




DRAGON

Production Tanks API 12F

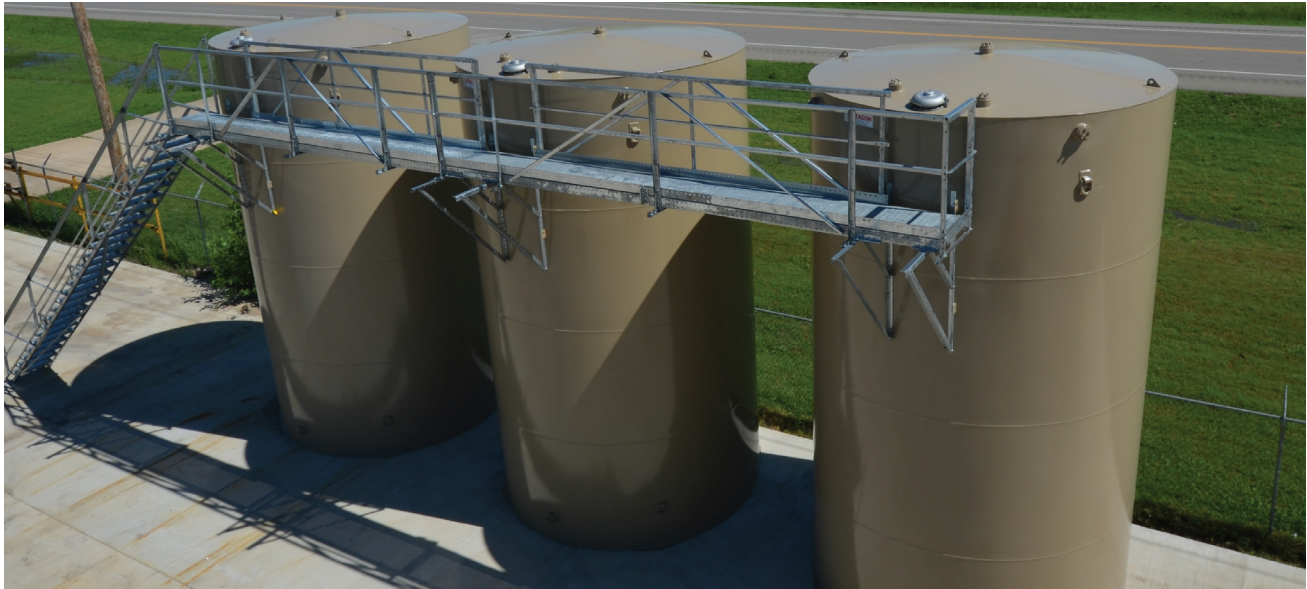

NOMINAL CAPACITY	DESIGN PRESSURE OZ. PER SQ. IN. PRESS. VACUUM		APPROXIMATE WORKING CAPACITY BBL	OUTSIDE DIAMETER FT. - IN.	HEIGHT FT.
90	16	1/2	72	7-11	10
100	16	1/2	79	9-6	8
150	16	1/2	129	9-6	12
200	16	1/2	166	12-0	10
210	16	1/2	200	10-0	15
250	16	1/2	224	11-0	15
300	16	1/2	266	12-0	15
400	16	1/2	366	12-0	20
500	16	1/2	466	12-0	25
500	8/16	1/2	479	15-6	16
750	8/16	1/2	746	15-6	24
1000	8/16	1/2	997	15-6	30

SPECIFICATIONS:

- Built to API 12F specifications monogrammed and non-monogrammed
- 3/16 or 1/4 inch steel plate construction
- Steel shot blasting prior to direct to metal industrial coating paint
- Internal lining available

ADD-ONS AVAILABLE:

- API Manways • Threaded Fittings
- Stairs and Walkways
- Gravel bands • Dike walks
- Decelerators • Cable Level Gauges
- Fill Lines • Thief Hatches
- Knuckle Boom Truck Delivery





email: production.equipment@modernusa.com

PRODUCTIONTANKS • 7/14

www.dragonproductsltd.com • 800-231-8198

U.S. OWNED AND OPERATED FOR OVER 50 YEARS. © COPYRIGHT 2020 MODERN GROUP INC. ALL RIGHTS RESERVED.

Production Tanks API 12F

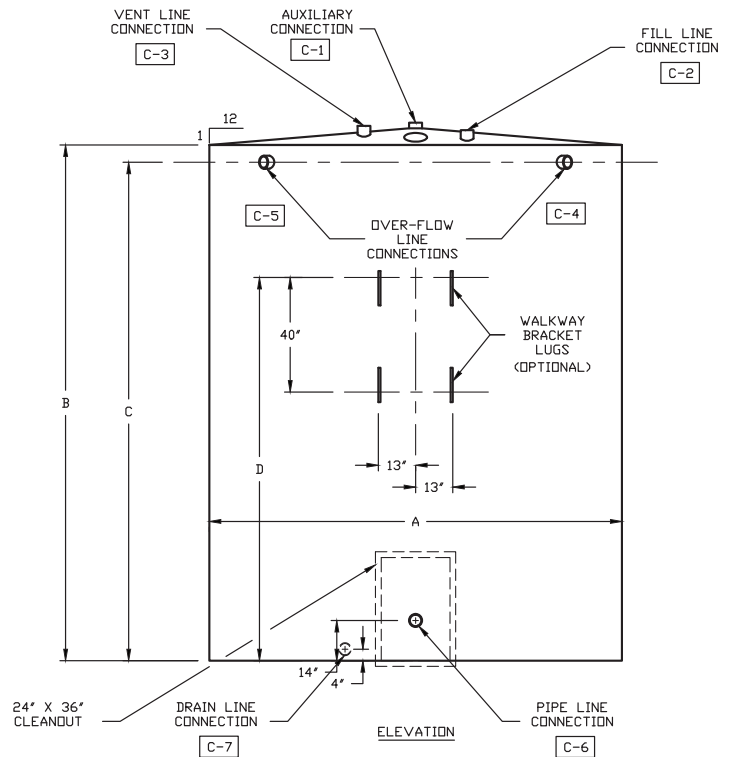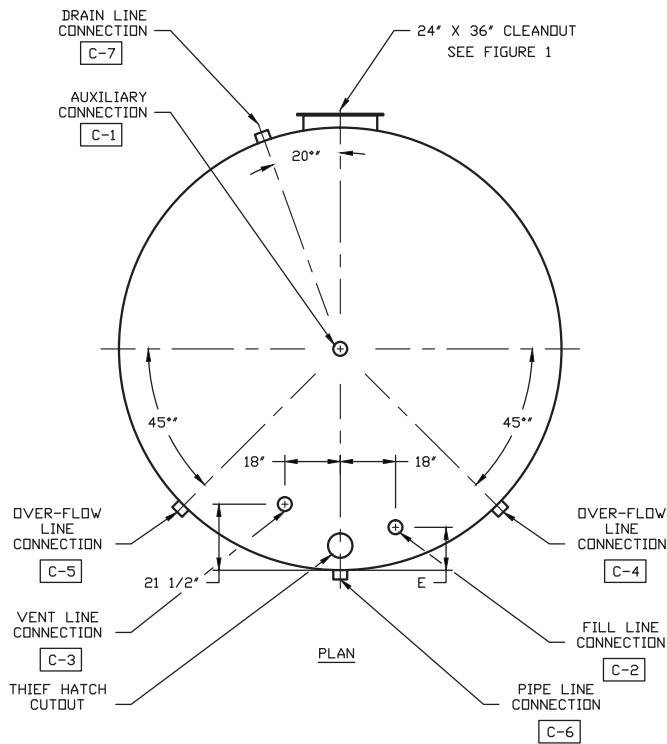

NOMINAL CAPACITY	DESIGN PRESSURE		APPROXIMATE WORKING CAPACITY BBL	OUTSIDE DIAMETER FT. - IN.	HEIGHT FT.	SITE OF CONNECTIONS - IN.		
	OS. PER SQ. IN.	VACUUM				C-1, C2 C-3, C-7	C-4, C-5 C-6	
90	16	1/2	72	7-11	10	3	3	
100	16	1/2	79	9-6	8	3	3	
150	16	1/2	129	9-6	12	3	3	
200	16	1/2	166	12-0	10	3	4	
210	16	1/2	200	10-0	15	3	4	
250	16	1/2	224	11-0	15	4	4	
300	16	1/2	266	12-0	15	4	4	
400	16	1/2	366	12-0	20	4	4	
500	16	1/2	466	12-0	25	4	4	
500	8/16	1/2	479	15-6	16	4	4	
750	8/16	1/2	746	15-6	24	4	4	
1000	8/16	1/2	997	15-6	30	4	4	



email: production.equipment@modernusa.com

www.dragonproductsltd.com • 800-231-8198

U.S. owned and operated for over 50 years. © Copyright 2020 Modern Group Inc. All rights reserved.